

SJ-530 THREE PORT BALL VALVE




For pressure rating, listing, and approval information, refer to data sheet or visit SHURJOINT website www.shurjoint.com for details or contact your SHURJOINT representatives.

The Shurjoint Model SJ-530 is a grooved-end three-port ball valve designed to divert media from bottom inlet to either of the two outlets ports. The valve port is a regular port size and the stem is a blowout proof design to MSS SP-72 and API Standard 608. The valve is supplied with a carbon steel lever handle equipped with a tamper resistant locking device.

The valve body is made of ferritic ductile iron conforming to ASTM A395/A (UNS F33100) with black electro deposition coating. The three-port ball is austenitic stainless steel to ASTM A351 CF8M (316) and blowout proof stem is stainless steel to ASTM A479 Type 316. All materials are chosen to meet the requirements of NACE MR0175-2003.

material specification

- **Body and End Cap:**
Ferritic ductile iron to ASTM A395/A (UNS F33100).
- **Surface Finish:**
Black electro-deposition coating.
- **Ball:**
Austenitic stainless steel to ASTM A351 CF8M (316).
- **Stem:**
Austenitic stainless steel to ASTM A479 Type 316.
- **Seats:**
Reinforced PTFE (polyterafluoroethylene).
- **Body Seal:**
PTFE (polyterafluoroethylene).
- **Stem Hardware:**
Type 304 Stainless Steel.
- **Lever Handle:**
Carbon steel with plastic grip
 - Type 304 stainless steel (optional)

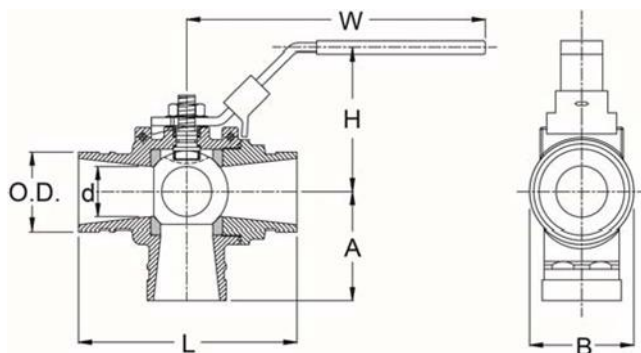

Model SJ-530 Three Port Ball Valve

Nominal Size Run x Branch	Pipe O.D.	Max. Working Pressure (CWP)*	Operating Torquet	Dimensions						Weight
				L	H	W	d	A	B	
in	in	PSI	lbs-in	in	in	in	in	in	in	lbs
mm	mm	Bar	Nm	mm	mm	mm	mm	mm	mm	kg
2	2.375	600	150	6.55	4.32	8.96	1.50	3.25	3.13	7.89
50	60.3	42	17	167	110	228	38	83	79	3.58

*Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.

‡ For the first opening or closing of the valve when the valve is not continuously operated, an additional torque of 2.0 – 2.5 times the listed operating torque is normally required.

Flow Characteristics

Valve Size in	Cv / Kv Full Open
2"	36 / 31

General note

- Maximum Working Pressure (CWP) listed is the maximum cold water pressure for general piping services tested to ASTM F1476 and or AWWA C606 methods. Figures listed are based on roll- or cut-grooved standard wall carbon steel pipe. For other pipe schedules or pipe materials, contact Shurjoint for additional information.
- Field Joint Test: For one time only, the system may be tested hydrostatically at 1½ times the maximum working pressure listed (AWWA C606 5.2.3).
- Warning: Piping systems must always be depressurized and drained before attempting disassembly and or removal of any components.
- The 10 Year Limited Warranty applies to manufacturing defects only and does not cover severe service/temperature applications or wear parts.
- Shurjoint reserves the right to change specifications, designs and or standard without notice and without incurring any obligations.