


**UNIFORM STATUTORY DECLARATION FORM FOR THE REGISTRATION OF FITTING DESIGNS**

NEW BRUNSWICK  
NUNAVUT

NOVA SCOTIA  
YUKON

PRINCE EDWARD ISLAND  
NORTHWEST TERRITORIES

NEWFOUNDLAND AND LABRADOR

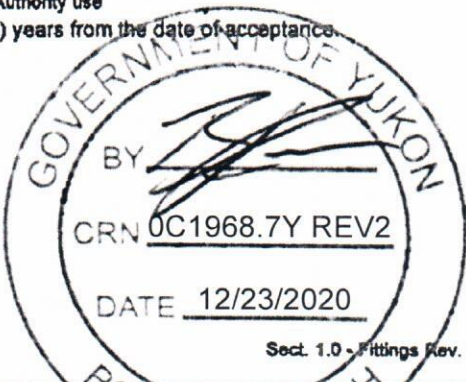
MANUFACTURERS NAME: <u>Aalberts integrated piping systems APAC</u>	
MANUFACTURERS ADDRESS: <u>No. 295, Sec. 3, Wandan Road, Wandan Township, Pingtung, Taiwan R.O.C.</u>	
PLANT LOCATIONS: <u>As above</u>	
<p align="center"><b>CATEGORY OF FITTINGS TO BE REGISTERED. CIRCLE ONE CATEGORY ONLY</b></p> <p>A Pipe fittings, including couplings, tees, elbows, Ys, plugs, unions, pipe caps, or reducers                  B Flanges: all flanges                  C Valves: all line valves                  D Expansion joints, flexible connections, and hose assemblies: all types                  E Strainers, filters, separators, and steam traps                  F Measuring devices, including pressure gauges, level gauges, sight glasses, levels, or pressure transmitters                  G Certified capacity-rated pressure relief devices acceptable as primary over pressure protection on boilers, pressure vessels, piping and fusible plugs                  H Pressure retaining components that do not fall into one of the above categories                  N Nuclear components: Class 1 <input type="checkbox"/> Class 2 <input type="checkbox"/> Class 3 <input type="checkbox"/>, (Meeting CNSC or ASME requirements)</p>	<p align="center"><b>TITLE OF THE STANDARD OF CONSTRUCTION</b></p> <p>ASME B31.3</p>
<p align="center"><b>SHOW MANUFACTURERS NAME, TRADEMARK, OR LOGO AS IT WILL APPEAR ON THE PRODUCT</b></p> <p align="center">  </p>	<p align="center"><b>TYPE OF CONSTRUCTION</b></p> <p>FORGED <input type="checkbox"/> WELDED <input type="checkbox"/> WROUGHT <input type="checkbox"/>                  CAST <input type="checkbox"/> OTHER <input checked="" type="checkbox"/>                  DESCRIBE OTHER:</p>
<p align="center"><b>LIST OF SUPPORTING DOCUMENTATION AND IDENTIFICATION OF THE ACTUAL ITEMS TO BE REGISTERED:</b></p> <ul style="list-style-type: none"> <li>- LRQA certificate of approval No: ISO 9001 - 0068440</li> <li>- Renew OC1968.7C.</li> <li>- See document "CRN Registration" dated Oct. 30, 2020, drawings &amp; proof test records.</li> </ul>	

**DECLARATION:**

I CHIU, YING - CHUAN (see note 3) employed by Aalberts integrated piping systems APAC Inc. and being the person having full authority and responsibility for the quality of the end product do solemnly declare that the information contained in this form is true and to the best of my knowledge represents the product for which registration is sought. The dimensions, materials of construction, pressure temperature ratings, and identification markings are in accordance with the herein named standards. I further declare that the manufacture of these fittings is regulated by a Quality Control Program which extends to each plant where fabrication occurs in whole or in part and has been verified by LRQA certificate No. ISO 9001 - 0068440 as being suitable for that purpose and I make this solemn declaration conscientiously believing it to be true, and knowing that it is of the same force and effect as if made under oath.

Signature of Declarer: CHIU, YING CHUAN  
 Declared before me at Kaohsiung  
 This 20th day of November AD 2020  
 Commissioner of Oaths or Notary Public: (sign) Juang, Chi-Hong

USE THIS SPACE FOR  
OFFICIAL SEAL

<p align="center">This space for Regulatory Authority use</p> <p align="center"><del>This registration must be revalidated after ten (10) years from the date of acceptance.</del></p> <p>CRN: <u>0C1968.7 Rev2</u>  <u>16031</u>                  FID#: _____                  Rev. is CRN renewal and company name change from Shurjoint to Aalberts Integrated Piping Systems APAC Inc. Model SJ-C300, SJ-400, SJ-300N, SJ-200, SJ-300F, 680 butterfly valves, SJ-600, SJ-600.</p> <ol style="list-style-type: none"> <li>1. All fittings shall be registered in the name of the Manufacturer.</li> <li>2. Each category shall be supported with two Statutory Declaration forms and one copy of supporting documentation.</li> <li>3. The declaration shall be made by the person having full authority and responsibility for the quality of the end product.</li> <li>4. Quality control programs shall be resubmitted for validation at a maximum interval of five (5) years.</li> </ol> <p>SJ-500L, 835 ball valves; RCV, SJ900, SJ-930, SJ-915 check valves.</p>	 <p>BY <u>[Signature]</u>                  CRN <u>0C1968.7Y REV2</u>                  DATE <u>12/23/2020</u></p> <p align="right">Sect. 1.0 - Fittings Rev. 1 06/2003</p>
---	---

# CRN Registration

Oct. 30, 2020

Shurjoint Grooved Components are to be registered (Category C -Valves)

Model Number	Size Range (inch)	Rated Pressure (psi)	Service Temperature	Drawings
SJ-C300 Butterfly Valve for Copper Tubing	2, 2½, 3, 4, 5, 6	150	EPDM: -4°F ~ +230°F (-20°C ~ +110°C)	AS-SJC300 1CKa 1CKb 1CKc
SJ-600 Ball Valve	1½, 2, 2½, 3, 4	300	-20°F ~ +230°F (-7 °C ~ +110°C)	AS-SJ600SS-a AS-SJ600SS-b 1SXa 1SXb 1SXc 1SXd 1SXe
SJ-400 Butterfly Valve	3, 4	250	EPDM: -20°F ~ +180°F (-29°C ~ +82°C)	AS-SJ400 1CNa 1CNb 1CNc
SJ-300N Butterfly Valve	2, 2½, 3, 4	300	EPDM: -4°F ~ +230°F (-20°C ~ +110°C)	AS-SJ300N 1J3a 1J3b 1J3c
RCV Riser Check Valve	2½, 3, 4, 5, 6	200	EPDM: -20°F ~ +180°F (-29°C ~ +82°C)	AS-RCV 1RVa 1RVb 1RVc 1RVd 1RVe 1RVf
	8	125		
SJ-200 Low Profile Butterfly Valve	2, 2½, 3, 4, 6	125	EPDM: -20°F ~ +180°F (-29°C ~ +82°C)	AS-SJ200 1JNa 1JNb 1JNc 1JNd

Model Number	Size Range (inch)	Rated Pressure (psi)	Service Temperature	Drawings
SJ-300F Resilient Seated Butterfly Valve	2½, 3, 4, 5, 6	200	EPDM: -20°F ~ +180°F (-29°C ~ +82°C)	AS-SJ300F AS-SJ300F-a 1JLa 1JLb 1JLc 1JLd 1JLe 1JLf 1JLi
SJ-500L Ball Valve	1½, 2, 2½, 3	250	EPDM: -20°F ~ +180°F (-29°C ~ +82°C)	SJ500-C-3
	4, 6	200		
SJ-900 Swing Check Valve	2½, 3, 4, 5, 6	200	EPDM: -20°F ~ +180°F (-29°C ~ +82°C)	AS-SJ900 1J9a 1RVb 1RVc 1RVd 1RVe 1RVf
	8	150		
SJ-930 Horizontal Swing Check Valve	2, 2½, 3, 4	200	EPDM: -20°F ~ +180°F (-29°C ~ +82°C)	AS-SJ930 1AJa 1AJb 1AJc AS-7771 H108a AS-XH70EP H1X8 G15a 7705TB 160a S819001
SJ-915 Dual Disc Check Valve	2½, 3, 4, 6, 8	300	EPDM: -20°F ~ +180°F (-29°C ~ +82°C)	AS-SJ915 AS-SJ915_b 1JKa 1JKb 1JKc 1JKd 1JKe
	10, 12	150		
	14, 16, 18, 20, 24	100		